

RS-485 PAN AND TILT HEADS

Max Load 50 kg, IP66, ABSOLUTE POSITION




PT-2050

- Material: Aluminum die casting
- Color: Gray corrosive protecting paint
- Motor Type: DC motor
- Rotating angle: PT-2050 Pan 0-340° ±5% OPTION: 0-359° ±5%
- Rotating angle: PT-2050CR Pan 360° Continuous Rotation
- Speed: Max tilt -45° to +45°
Pan 0.01°~ 12°/sec
Tilt 0.01°~ 8°/sec
- Positioning accuracy: <0,1°
- Load Capacity: 50 kg
- Voltage Supply: DC24V
- Power Consumption: 80W
- Temperature: -10°C to +60°C (-25°C to +60°C with optional heater)
- Weight: 23 kg
- Size (mm): 350mmx206mmx380mm (L.W.H.)
- Protection: IP66
- Electric power: Max. 4A. (Stand by mode 0,07A)
- Baud rate : 2400/4800/9600/19200 bps, N,8,1
- Protocol : PELCO-D, Absolute position, Position readout
- Receiver function : PRESETS: 200
Network cable (Optional)
Control Motorized zoom lens (ZOOM, FOCUS)
Built-in receiver address setting range from 0~up to 255
Standard cable for Analog Camera (HD-SDI slip ring OPTIONAL)
- Video cable type: RS-485 (RS-422 optional)
- Communication interface :

RS-485 PAN AND TILT HEADS

Max Load 50 kg, IP66, ABSOLUTE POSITION

All specifications and product descriptions are subject to changes without notice.

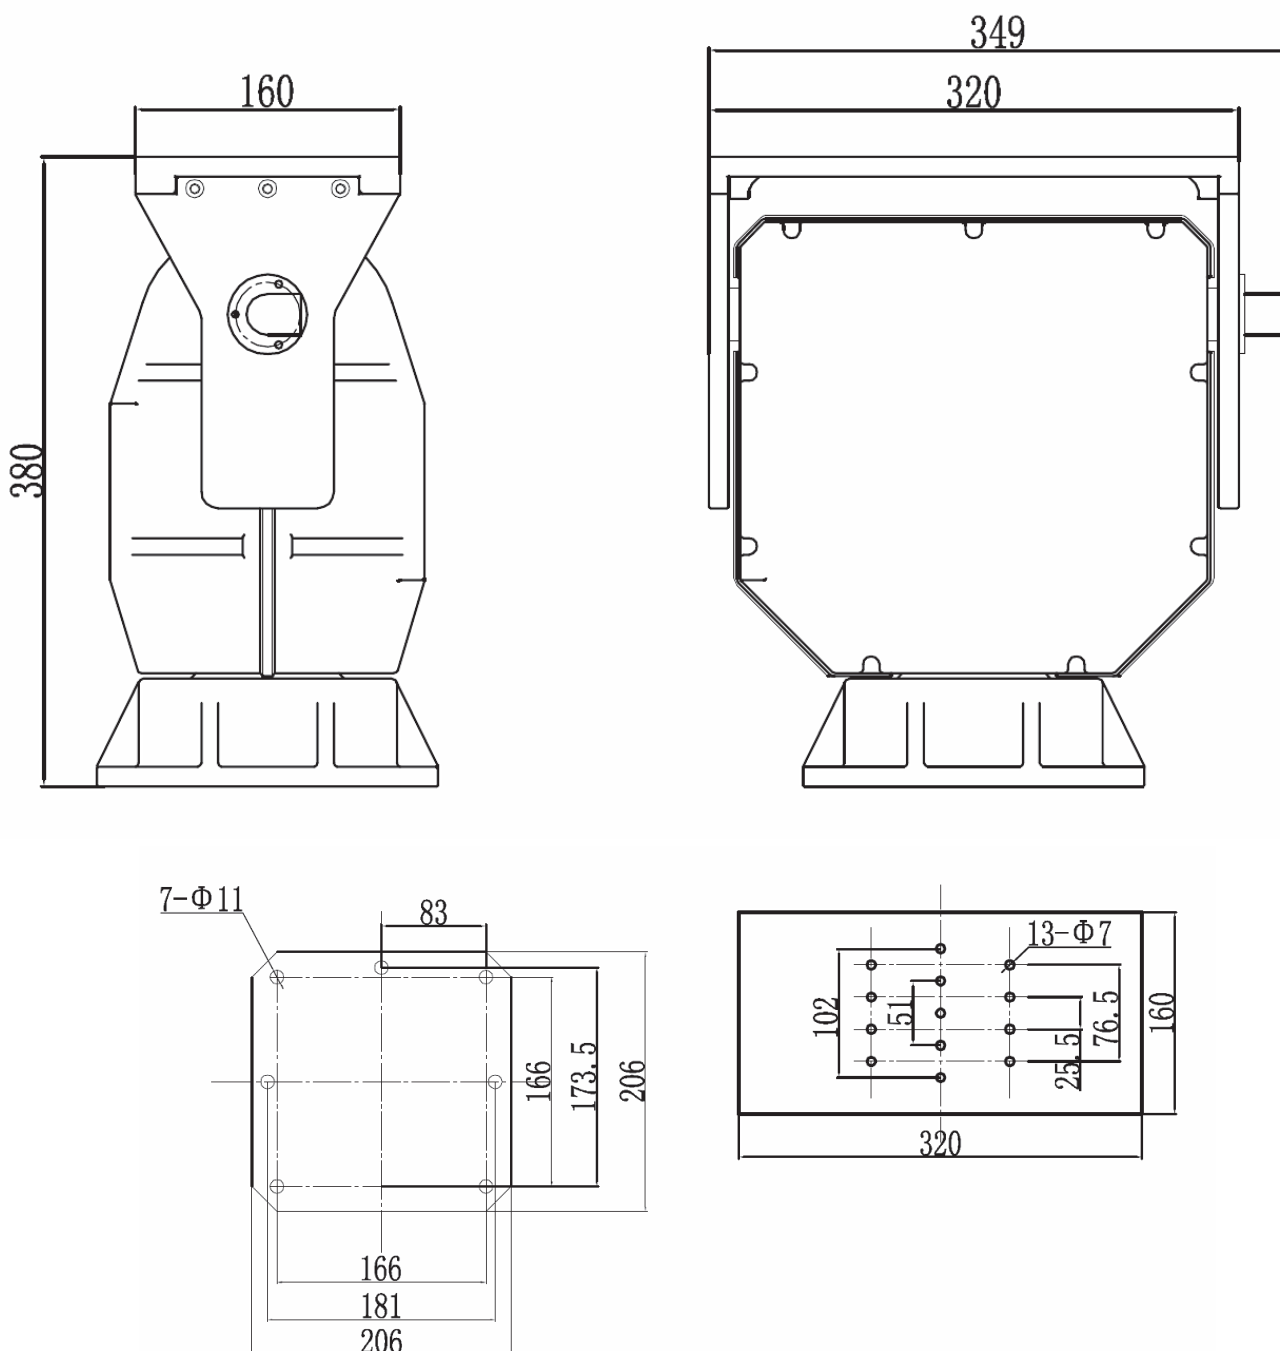

PT-2050