

RS-485 PAN AND TILT HEADS

Max Load 10 kg, IP67, ABSOLUTE POSITION




PT-1015CR or PT-1015, IP67
Max Load 10 kg

All specifications and product descriptions are subject to changes without notice.

•Material:	Aluminum die casting
•Color:	Gray corrosive protecting paint
•Motor Type:	DC motor
•Rotating angle: PT-1015	Pan 0-359° ±5%
	Max Tilt -60° to +60°
•Rotating angle: PT-1015CR	Pan 0-360° Continuous Rotation
	Max tilt -60° to +60°
•Speed:	Pan 0.01°~ 30°/sec
	Tilt 0.01°~ 15°/sec
•Positioning accuracy:	<0,1°
•Load Capacity:	10 kg
Mount:	Top-mounted or Side mounted (OPTIONAL)
•Voltage Supply:	AC/DC24V
•Voltage Output for camera:	DC12V (OPTIONAL)
•Operation Temperature:	-10°C to +65°C (-25°C to +65°C with optional header)
•Weight:	5.9 kg
•Size (mm):	128Dx194Wx235H
•Protection:	IP67
•Power Consumption:	50W
•Baud rate :	2400/4800/9600/19200 bps, N,8,1
•Protocol :	PELCO-D, Absolute position, Position readout
•Receiver function :	PRESETS: 100
	Network cable for IP cameras (OPTIONAL)
	Control Motorized zoom lens (ZOOM, FOCUS) (OPTIONAL)
	Built-in receiver address setting range from 0~up to 255
•Communication interface :	RS-485 (RS-422 optional)
•Options:	Network Cable OPTIONAL
•Options:	HD-SDI Slip rings OPTIONAL

RS-485 PAN AND TILT HEADS

PT-1015CR, PT-1015. Max Load 10 kg , IP67

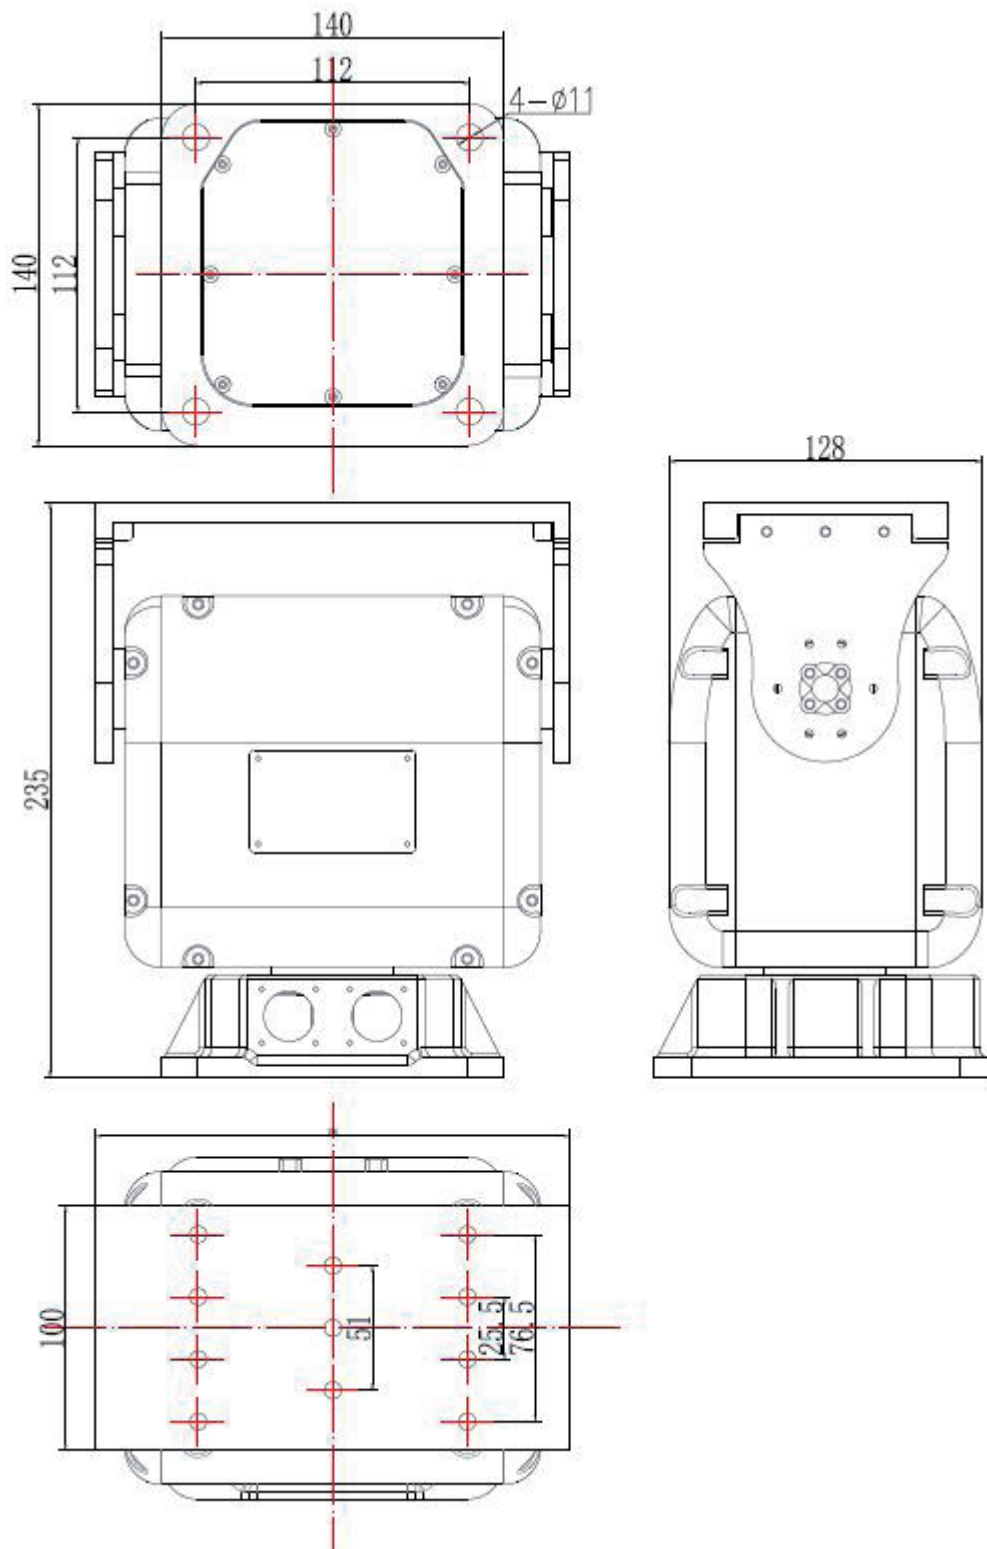

All specifications and product descriptions are subject to changes without notice.