

OHS-1000 HOUSING SERIES

HOUSING, IP66, OUTDOOR




OHS-1025
w. optional wiper



OHS-1025 DSLR
optional
double sunshield



OHS-1030
w. optional wiper




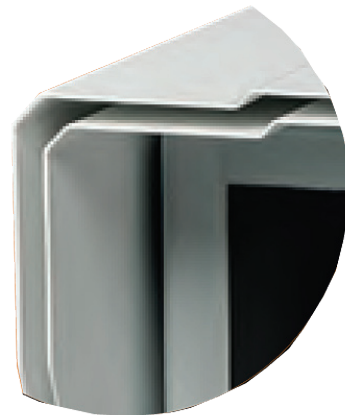


Optional double sunshield
available for all models

OHS-1000 HOUSING SERIES

HOUSING, IP66, OUTDOOR

All specifications and product descriptions are subject to changes without notice.

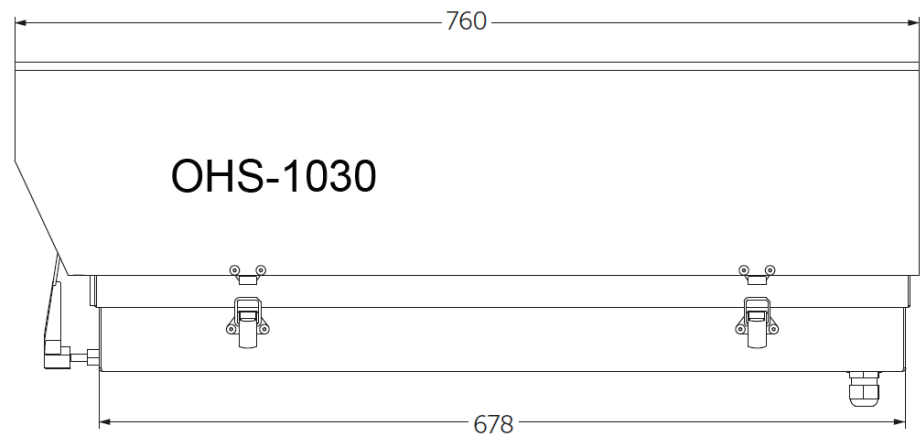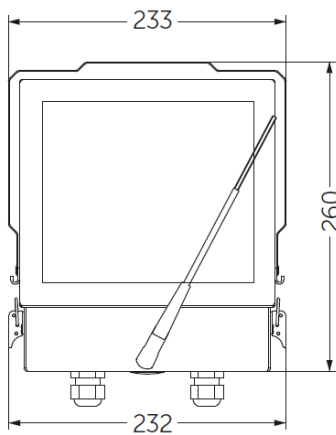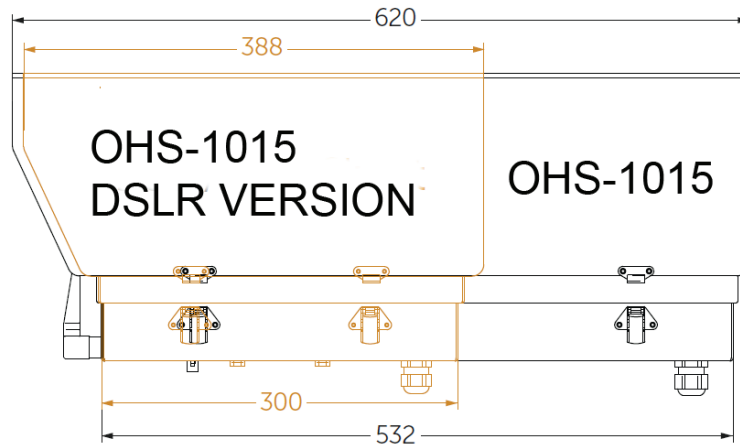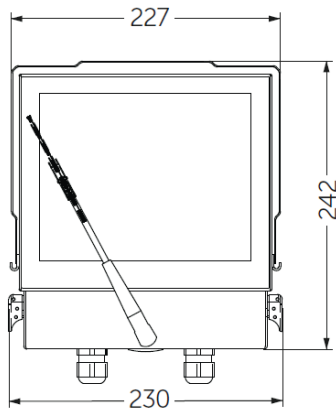

Dimensions External (mm)

- Height (mm)
- Width (mm)
- Length with sunshield (mm)
- Depth inside base (mm)
- Weight (Kg) (Aluminum)
- Weight w/wiper (Aluminum)
- Weight w/wiper and fan cooled sunshield
- Voltage versions
- Internal size mm (L x H x W)
- Material
- Cable entry
- Heater
- House colour
- Temp. Range

	OHS-1025	OHS-1025DSLRL	OHS-1030
Height (mm)	242	242	259
Width (mm)	230	230	232
Length with sunshield (mm)	620 (760)*	388	760
Depth inside base (mm)	57	57	55
Weight (Kg) (Aluminum)	5.0	4.0	6.0
Weight w/wiper (Aluminum)	5.5	4.5	6.5
Weight w/wiper and fan cooled sunshield	6.3		
Voltage versions	AC240V, AC24V, DC12V, DC24V		
Internal size mm (L x H x W)	505x178x167	273x178x167	650x180x170
Material	Aluminum housing with stainless fittings		
Cable entry	Two 20mm glands and one 25mm blinded hole		
Heater	32W self regulating heater.		
House colour	Grey/white	Grey/white	Grey/white
Temp. Range	-25° ~ +55°C		